

Maximum and Minimum Values of Stress

The numerical variation of σ_ϕ and τ_ϕ for a given general stress state is given in Example 1. It can be seen that the maximum and minimum values of σ_ϕ occur at positions $\sim 25^\circ$ and 145° i.e. 90° apart, and that the maximum and minimum values of τ_ϕ occur at positions $\sim 45^\circ$ from the values of maximum σ_ϕ .

We can deduce these results mathematically.

Starting with equation (2):

$$\mathbf{s}_f = \frac{1}{2}(\mathbf{s}_x + \mathbf{s}_y) + \frac{1}{2}(\mathbf{s}_x - \mathbf{s}_y)\cos 2f + t_x \sin 2f$$

The turning points are given by:

$$\frac{d\mathbf{s}_f}{df} = 0$$

i.e.:

$$-(\mathbf{s}_x - \mathbf{s}_y)\sin 2f + 2t_x \cos 2f = 0$$

Hence, maximum and minimum values of σ_ϕ exist where:

$$\tan 2f = \frac{2t_x}{\mathbf{s}_x - \mathbf{s}_y}$$

(4)

Equation (4) gives two values of ϕ denoting the PRINCIPAL PLANES.

Substitution of these two values of ϕ into equation (2) give the maximum and minimum values of σ_ϕ known as the PRINCIPAL STRESSES.

σ_1 = maximum value of σ_ϕ

σ_2 = minimum value of σ_ϕ

Starting with equation (3):

$$t_f = -\frac{1}{2}(\mathbf{s}_x - \mathbf{s}_y)\sin 2f + t_x \cos 2f$$

Equating to zero again gives equation (4):

$$\tan 2f = \frac{2t_x}{s_x - s_y}$$

Hence shear stress is zero on the principal planes.

It can also be shown that the maximum shear stress is given by:

$$t_{\max} = \frac{1}{2}(s_1 - s_2) \quad (5)$$

and occurs on planes $\pm 45^\circ$ from principal planes.

Example 3

Determine analytically the directions and magnitudes of the principal stresses in Example 1. Hence find the maximum shear stress.

From equation (4), for the directions of σ_1 and σ_2 :



$$\tan 2f = \frac{2t_x}{s_x - s_y} = \frac{-50}{20} = -2.5$$

Hence, $2\phi = -68.2^\circ$ and 111.8°

Substituting into equation (2):

$$\begin{aligned} \sigma_{34.1} &= 20 + 10 \cos (-68.2) - 25 \sin (-68.2) \\ &= 20 + 3.7 + 23.8 \\ &= 46.9 \end{aligned}$$

$$\begin{aligned} \sigma_{55.9} &= 20 + 10 \cos (111.8) - 25 \sin (111.8) \\ &= 20 - 3.7 - 23.8 \\ &= -6.9 \end{aligned}$$

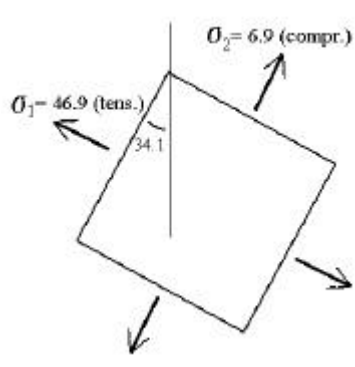

Maximum shear stress on planes at 45° to principal planes ($\phi = -79.1^\circ$ and 10.9°).

$$\tau_{-79.1} = -10 \sin(-158.2) - 25 \cos(-158.2)$$


$$= 3.7 + 23.2$$

$$= 26.9$$

$$\tau_{10.9} = -10 \sin(21.8) - 25 \cos(21.8)$$

$$= -3.7 - 23.2$$

$$= -26.9$$



Alternatively:

$$t_{\max} = \frac{1}{2}(s_1 - s_2)$$

$$= 0.5 (46.9 + 6.9)$$

$$= 26.9$$

Shear stresses are towards σ_1 (away from σ_2).

